



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2016.11.04	JSY
REV.1	—	FPC加长20mm	2017.04.22	JSY
REV.2	—	更改功能片用1368的	2019.01.11	YHL


Front View

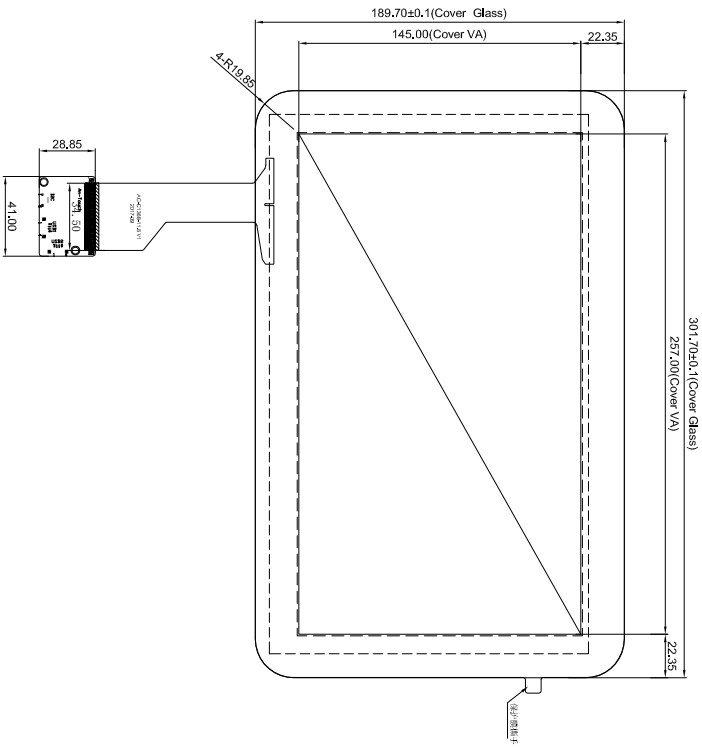

Side View

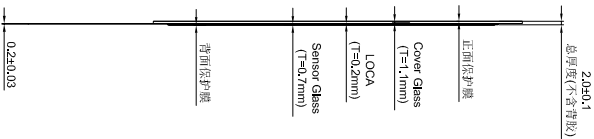

Back View

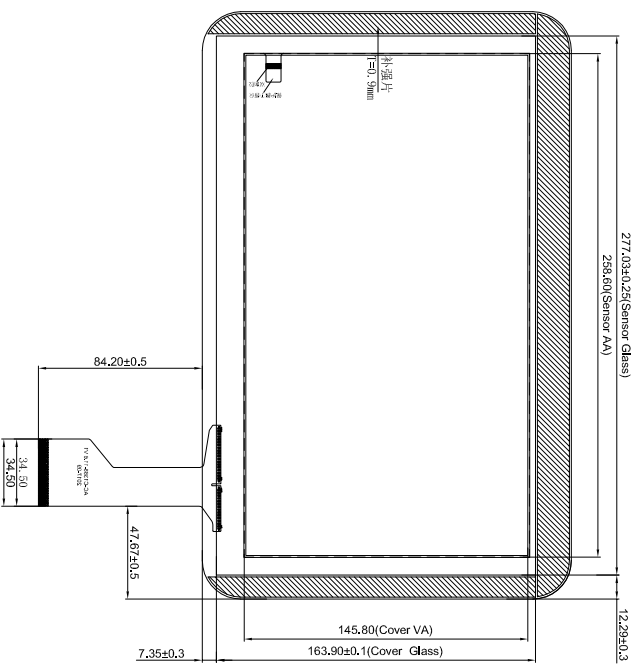

Notes:

1. TP Structure: G+G;
2. TP Type: COB; IC: ILITEK2511
3. Transmittance: $\geq 85\%$
4. Hardless: $>6H$
5. Operating conditions: $-10^{\circ}\text{C}\sim+60^{\circ}\text{C}$, $\leq 85\%\text{RH}$
6. Storage conditions: $-10^{\circ}\text{C}\sim+65^{\circ}\text{C}$, $\leq 85\%\text{RH}$
7. Unspecified tolerance: $\pm 0.2\text{mm}$
8. All materials in the drawing comply with the Rosh

TP 叠构

层序	材料	厚度
1	Protect Film	0.1mm
2	Cover Glass	1.1mm
3	LOCA	0.2mm
4	ITO	0.7mm
5	Sensor Glass	0.7mm
6	ITO	0.7mm
7	Protect Film	0.1mm

AC-C1253-11.6 工程图

DESIGN	DATE	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
JSY	2017.04.22		1 of 1	mm	1:1	

深圳市安触科技有限公司

ShenZhen An-Touch Optics Tech.Co.,Ltd

80TT001
ksep00117