



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2016.05.23	JSY
REV.1	—	—	2016.11.23	JSY




正视图

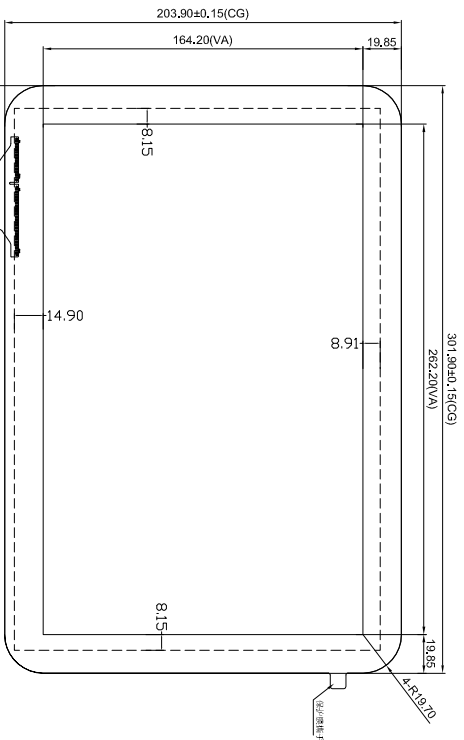

侧视图

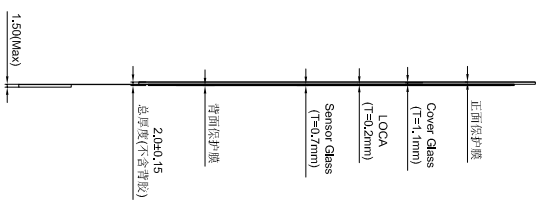

背视图

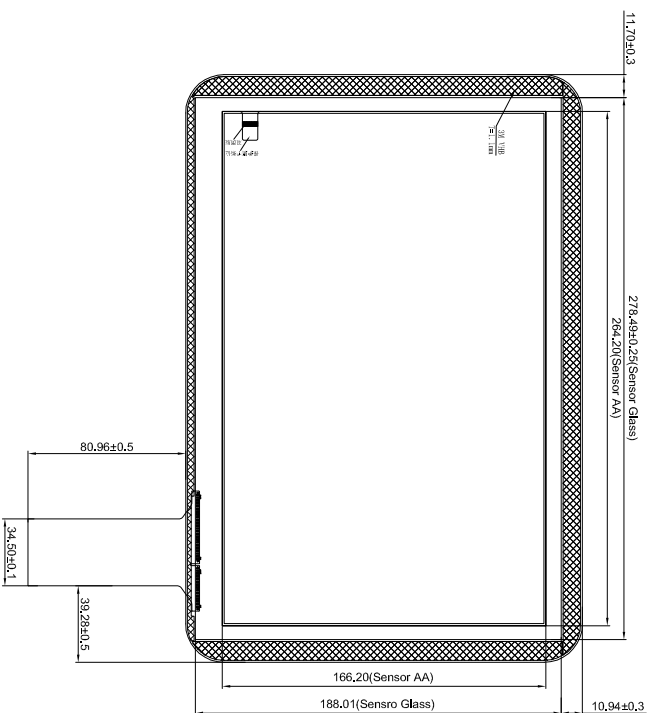

技术参数:

1. TP结构: G+G;
2. TP类型: COB; IC选用: ILITEK2511 (41*23)
工作电压: 3.3V-5V
3. 透光率: $\geq 85\%$
4. 表面硬度: 6H以上
5. 工作环境: $-10^{\circ}\text{C}^{\sim}+60^{\circ}\text{C}$, $\leq 85\%\text{RH}$
6. 储存环境: $-10^{\circ}\text{C}^{\sim}+65^{\circ}\text{C}$, $\leq 85\%\text{RH}$
7. 未注尺寸公差按 $\pm 0.2\text{mm}$
8. 产品符合RoHS标准.

TP 叠构

TP	Protect Film	} 0.7mm
	Cover Glass 1.1mm	
	LOCA 0.2mm	
	Sensor Glass	
	TTO	
	Protect Film	

J1 (USB通用)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

AC-C121005 工程图

DESIGN	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
JSY	2018.09.13	1 of 1	mm	1:1	